

FRC16-5850-6650-2K-137S

16-Way, 5.85~6.65GHz, 2000W

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:

- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical

Frequency:	5.85~6.65GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.6 max.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±8° max.
Impedance:	50Ω
Power @SUM Port:	2000W as combiner

Mechanical


Connectors: WR-137 (BJ70), SMA Female

How To Order

FRC16-5850-6650-2K-137S

Customization is available upon request.

Outline Drawings

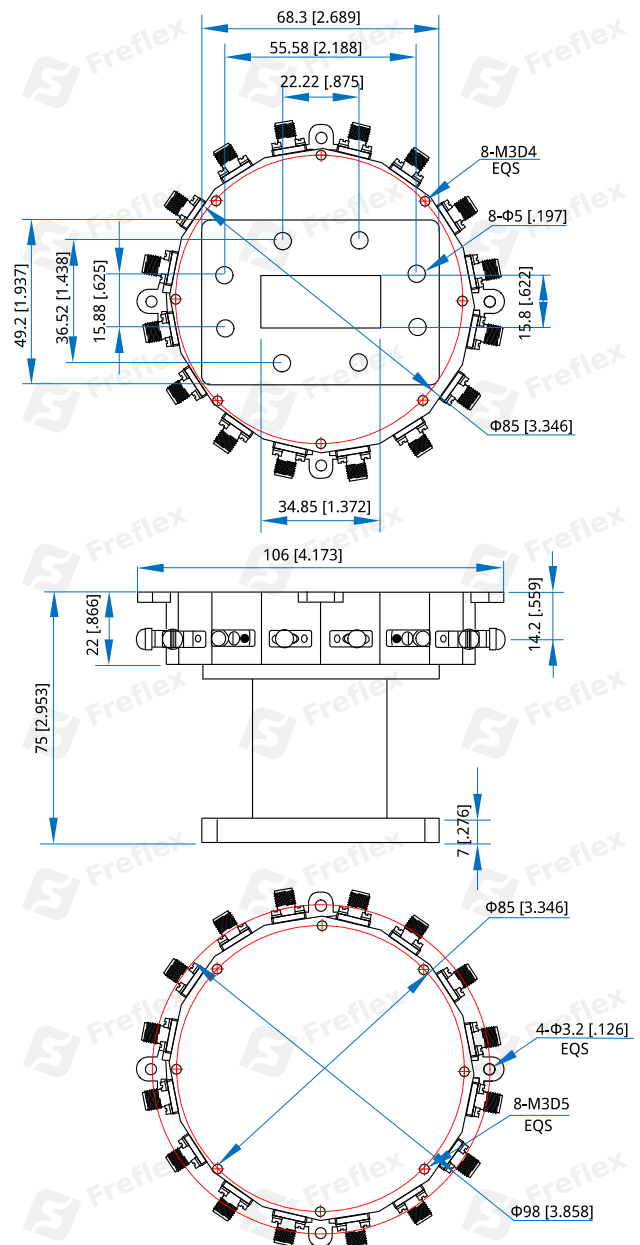

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]