

FPD12-0-4000-2-N

12-Way, DC~4GHz, 2W

Features:

- * Broadband
- * Low Insertion Loss
- * High Power

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	DC~4GHz
Insertion Loss:	23.6dB max.
VSWR:	1.5 max.
Isolation:	20dB min.
Amplitude Balance:	±2dB
Impedance:	50Ω
Power Handling:	2W

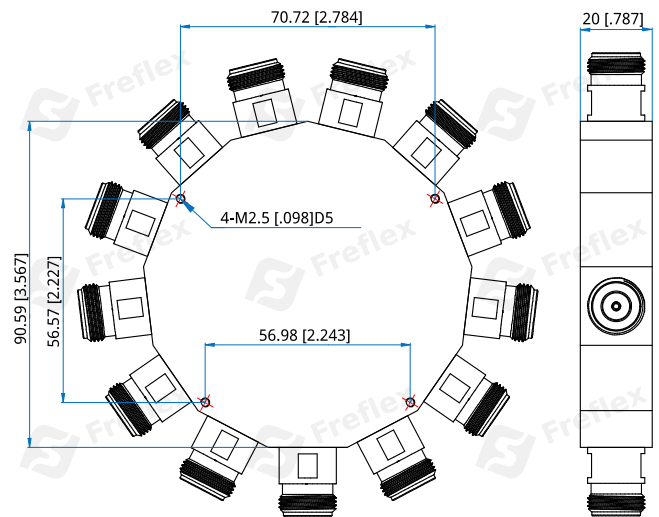
Mechanical

Size ^{*1} :	90.59*90.59*20mm 3.567*3.567*0.787in
Connectors:	N Female
Mounting:	4-M2.5, depth 5mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD12-0-4000-2-N

Customization is available upon request.