

FWPD8-16000-18000-K2-62

8-Way, 16~18GHz, 200W, WR-62

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	16~18GHz
Insertion Loss:	0.5dB max.
VSWR (SUM Port):	1.5 max.
Phase Balance:	$\pm 5^\circ$ max.
Amplitude Balance:	± 0.3 dB max.
Peak Power:	1000W
Power @SUM Port:	200W as divider 200W as combiner

Mechanical

Waveguide Size:	WR-62 (BJ140)
Flange:	FBP140
Connectors:	SMA Female (Removable, with $\Phi 0.5$ mm pin)
Material:	Aluminium
Finish:	Silver-plating

How To Order

FWPD8-16000-18000-K2-62-Y-Z-X

Y: Material

Z: Flange type

X: Coaxial type if applicable

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

1 - FBP (Outline A)

Coaxial naming rules:

S - SMA Female (Outline A)

Examples:


To order a 8-way waveguide power divider, 16~18GHz, 200W, WR-62, Aluminium, FBP140, SMA Female, specify FWPD8-16000-18000-K2-62-A-1-S.

Customization is available upon request.

Environmental

Operating Temperature: $-55 \sim +85^\circ\text{C}$

Outline Drawings

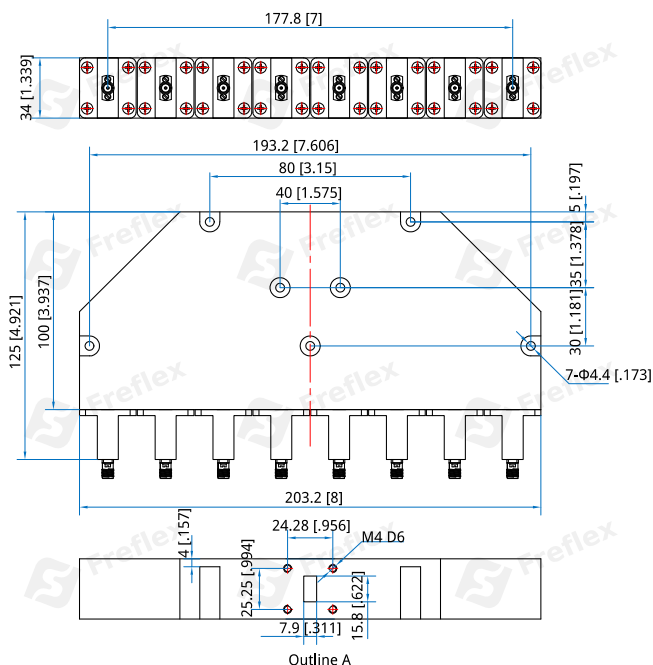

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]