

FPD8-2000-6000-30

8-Way, 2~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~6GHz
Insertion Loss:	1dB max. (SMA) 1.2dB max. (N)
Input VSWR:	1.3 max.
Output VSWR:	1.2 max.
Isolation:	18dB min. (SMA) 20dB min. (N)
Amplitude Balance:	0.3dB max. (SMA) 0.4dB max. (N)
Phase Balance:	±4°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical

Mounting:	4-Φ2.8mm through-hole (SMA) 4-Φ3.2mm through-hole (N)
-----------	--

Environmental

Operation Temperature: -40~+75°C

How To Order

FPD8-2000-6000-30-Y

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)



N - N Female (Outline B)

Examples:

To order a 8-way power divider, 2~6GHz, 30W, N female, specify FPD8-2000-6000-30-N.

Customization is available upon request.

Outline Drawings

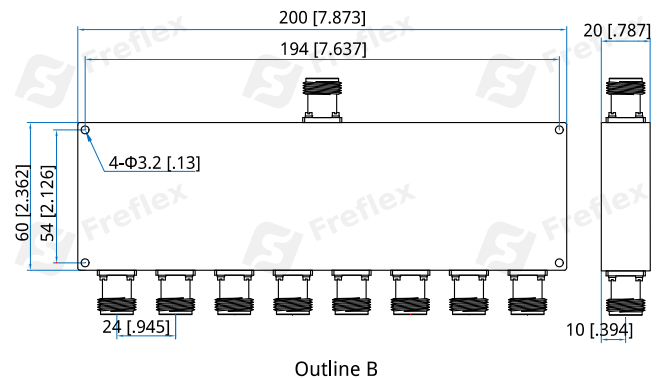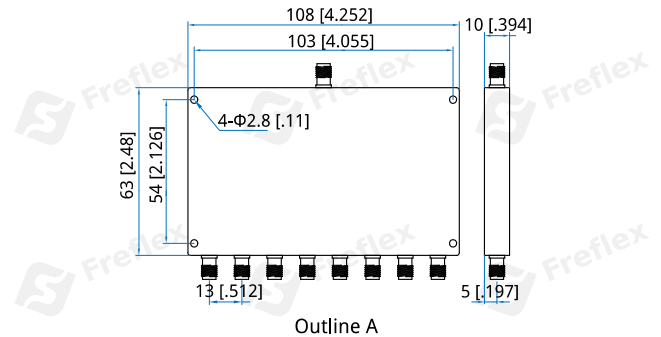

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]