

## FHC8-2700-3400-30-S

### 2.7~3.4GHz, 30W

Features:  
 \* Broadband  
 \* High Power  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

#### Electrical

Frequency:	2.7~3.4GHz
Insertion Loss:	0.4dB max.
Isolation:	20dB min.
VSWR:	1.35 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±5° max.
Average Power:	30W
Impedance:	50Ω

#### Mechanical


Size <sup>*1</sup> :	48*53*13mm 1.89*2.087*0.512in
RF Connectors:	SMA Female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

#### Environmental

Temperature:	-40~+85°C
--------------	-----------

#### Outline Drawings

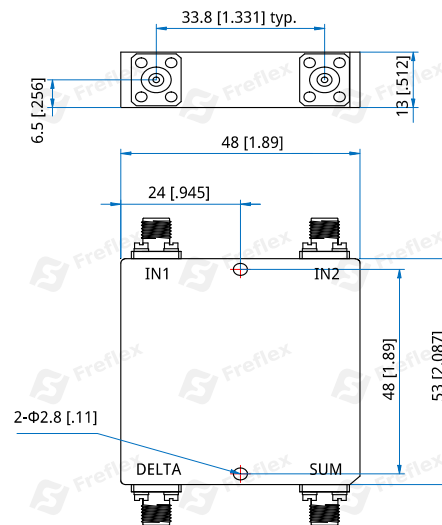

Unit: mm [in]  
 Tolerance: ±0.3mm [±0.012in]

#### How To Order

**FHC8-2700-3400-30-S**

Customization is available upon request.