

FHC8-6000-12400-30-S

6~12.4GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	6~12.4GHz
Insertion Loss:	1.8dB max.
Phase Balance:	±12° max.
VSWR:	1.6 max.
Isolation:	15dB min.
Average Power:	30W
Impedance:	50Ω

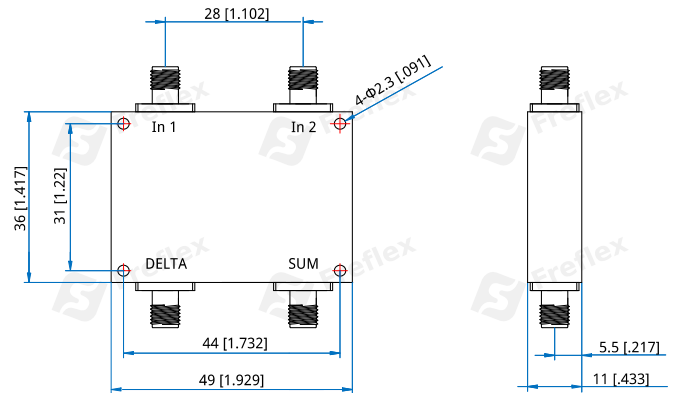
Mechanical

Size*1:	49*36*11mm 1.929*1.417*0.433in
RF Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FHC8-6000-12400-30-S

Customization is available upon request.