

FHC8-6000-26500-30-S

6~26.5GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	6~26.5GHz
Insertion Loss:	2dB max.
VSWR:	1.7 max.
Isolation:	15dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±10° max.
Average Power:	30W max.
Impedance:	50Ω

Mechanical


Size*1:	40*40.6*12.7mm 1.575*1.598*0.5in
Connectors:	SMA Female
Mounting:	2-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

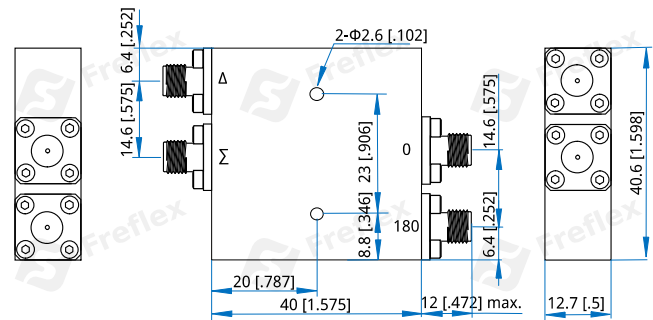

Unit: mm [in]

Tolerance: .xx±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

FHC8-6000-26500-30-S

Customization is available upon request.