

FHC8-6000-67000-12-V

6~67GHz, 12W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	6~67GHz
Insertion Loss*1:	4dB max.
VSWR:	2 max.
Isolation:	13dB min.
Amplitude Balance:	±1.2dB max.
Phase Balance:	±10° max.
Average Power*2:	12W
Peak Power:	1000W

[1] Excluding theoretical loss 3dB.

[2] The power needs to meet the matching VSWR not exceeding 1.2.

Frequency (GHz)	Insertion Loss* ¹ (dB max.)	VSWR (max.)	Isolation (dB min.)
6~18	2	1.6	16
18~40	3	1.8	14
40~67	4	2	13

Mechanical


Size*3:	40*40.6*12.7mm 1.575*1.598*0.5in
Connectors:	1.85mm female
Mounting:	2-Φ2.6mm through-hole

[3] Exclude connectors.

Enviromental

Operating Temperature:	-55~+85℃
Non-operating Temperature:	-55~+100℃

Outline Drawings

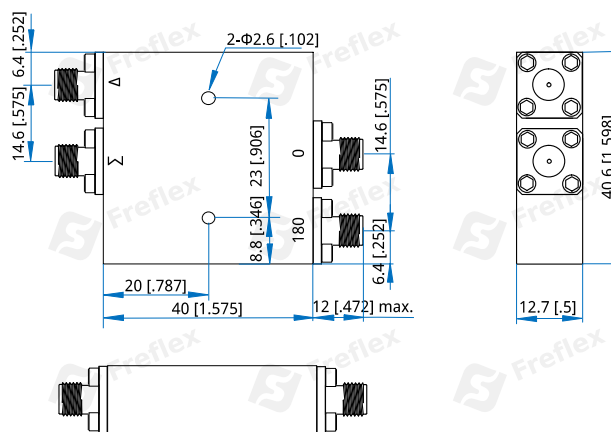

Unit: mm [in]

Tolerance: $\pm 1\text{mm}$ [$\pm 0.039\text{in}$]

How To Order

FHC8-6000-67000-12-V

Customization is available upon request.