

FPD2-1-500-25-S

2-Way, 0.001~0.5GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.001~0.5GHz
Insertion Loss:	1dB max.
VSWR:	1.4 max.
Isolation:	15dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	5° max.
Power @SUM Port:	25W as divider 25W as combiner

Mechanical


Size ^{*1} :	31.75*31.95*19.05mm 1.25*1.258*0.75in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

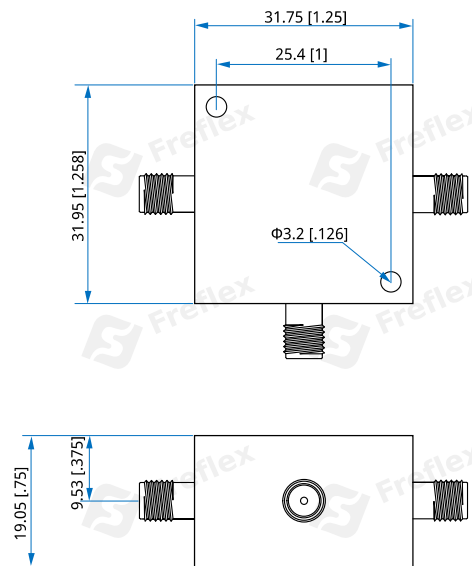

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

FPD2-1-500-25-S

Customization is available upon request.