

FPD2-1000-2000-K4-N

2-Way, 1~2GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	1~2GHz
Insertion Loss ^{*1} :	0.5dB max.
VSWR (SUM Port):	1.5 max.
Isolation:	12dB min.
Amplitude Balance:	±0.4dB
Phase Balance:	±5°
Impedance:	50Ω
Power @SUM Port:	400W max. as divider 400W max. as combiner

[1] Excluding theoretical loss 3dB.

Mechanical


Size ^{*2} :	62*50*22mm 2.441*1.969*0.866in
Connectors:	N Female
Mounting:	4-Φ2.4mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

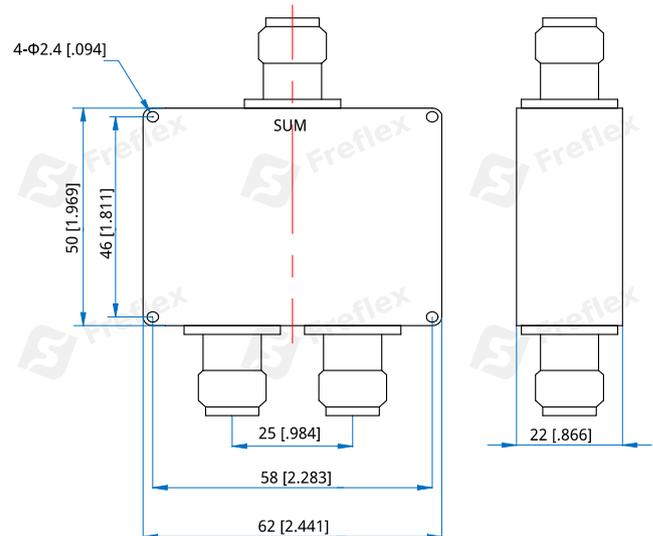

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FPD2-1000-2000-K4-N

Customization is available upon request.