

FPD2-2-30-2K-N

2-Way, 0.002~0.03GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.002~0.03GHz
Insertion Loss:	0.15dB max.
VSWR:	1.2 max.
Isolation:	30dB min.
Amplitude Balance:	±0.1dB max.
Phase Balance:	±1° max.
Power @SUM Port:	2KW as divider

Mechanical


Size ^{*1} :	160*166*58mm 6.299*6.535*2.283in
Connectors:	N Female

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

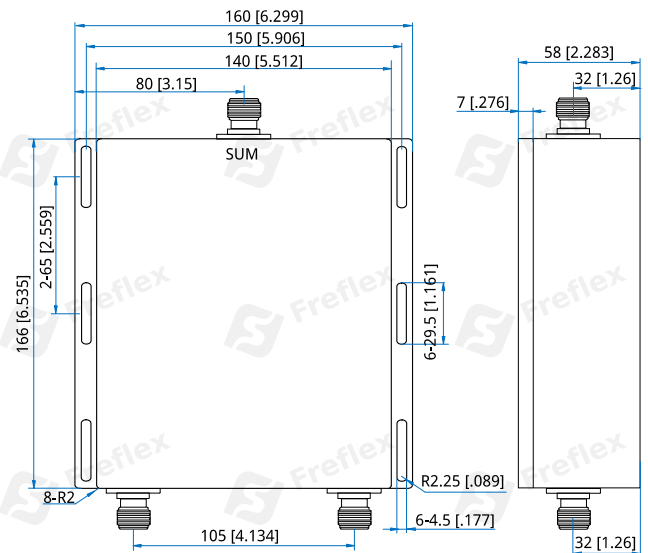

Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]

How To Order

FPD2-2-30-2K-N

Customization is available upon request.