

FPD2-4-30-K8-N

2-Way, 4~30MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

| | |
|------------------|---|
| Frequency: | 4~30MHz |
| Insertion Loss: | 0.3dB max. |
| Input VSWR: | 1.3 max. |
| Output VSWR: | 1.3 max. |
| Isolation: | 20dB min. |
| Impedance: | 50Ω |
| Power @SUM Port: | 800W max. as divider 800W max. as combiner |

Mechanical

Size^{*1}: 148*148*45mm
5.827*5.827*1.772in


Connectors: N Female

[1] Exclude connectors.

Environmental

| | |
|----------------------------|-----------|
| Operation Temperature: | -40~+60°C |
| Non-operation Temperature: | -55~+85°C |

Outline Drawings

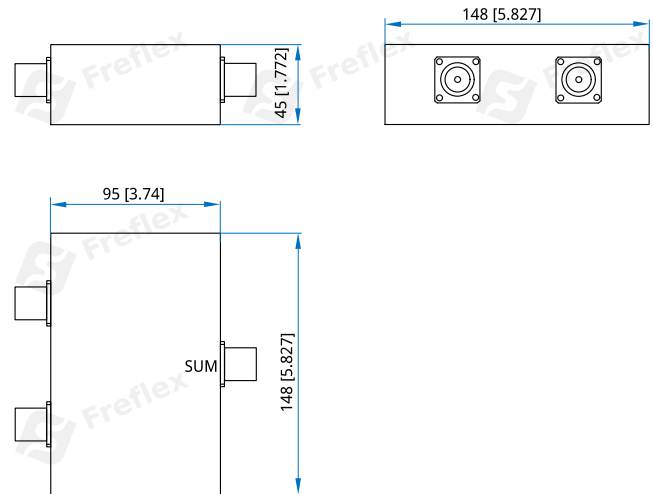

Unit: mm [in]
Tolerance: ±0.3mm [±0.012in]

How To Order

FPD2-4-30-K8-N

Customization is available upon request.