

## FWT62-30

### WR-62, 30W

Features:  
\* Low VSWR

Applications:  
\* Transmitters  
\* Antennas  
\* Laboratory Test  
\* Impedance Matching

#### Electrical

Frequency: 11.9~18GHz  
Average Power: 30W  
VSWR: 1.03 max.


#### Mechanical

Waveguide Size: WR-62 (BJ140)  
Flange: FBP140

#### Environmental

Temperature: -55~+125°C

#### Outline Drawings

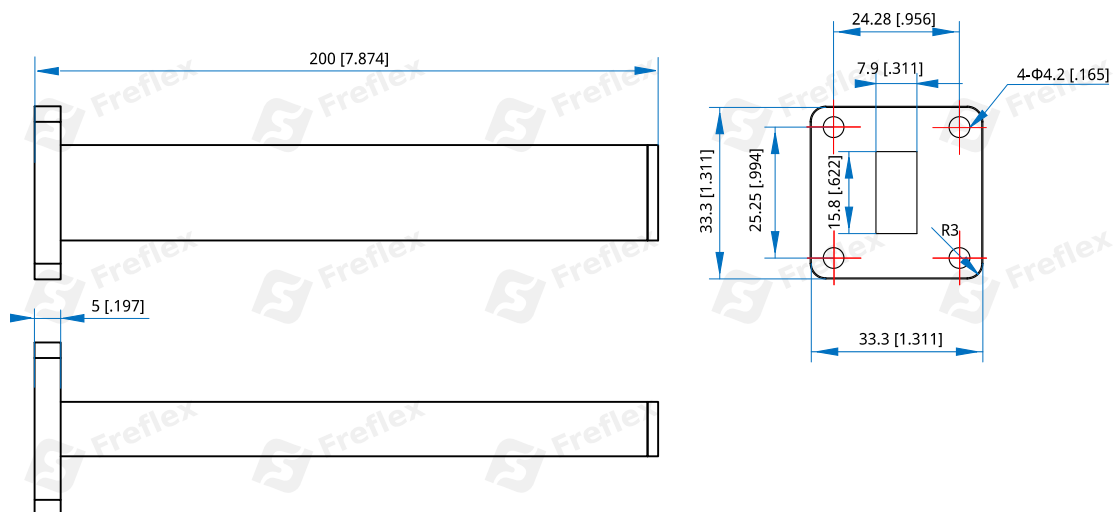

Outline A

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

#### How To Order

**FWT62-30-Y-Z**

Y : Material

Z : Flange type

Material naming rules:  
A - Aluminum (Outline A)

Flange naming rules:

1 - FBP140 (Outline A)

Examples:

To order a low power waveguide termination, WR-62, 30W, FBP140, specify FWT62-30-A-1.

Customization is available upon request.