

# FPD22-200-2000-20-S

## 22-Way, 0.2~2GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

### Electrical

Frequency:	0.2~2GHz
Insertion Loss:	10dB max.
VSWR:	1.65 max.
Isolation:	15dB min.
Amplitude Balance:	±1dB max.
Phase Balance:	±2° max.
Power @SUM Port:	20W as divider

### Mechanical


Size <sup>*1</sup> :	280*280*12.7mm 11.024*11.024*0.5in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

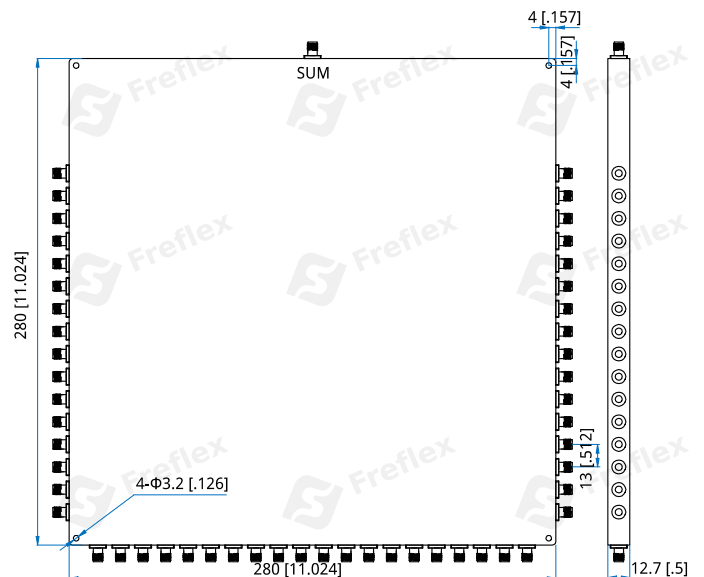

Unit: mm [in]  
 Tolerance: ±0.3mm [±0.012in]

### How To Order

**FPD22-200-2000-20-S**

Customization is available upon request.