

FPD24-11000-15000-2-S

24-Way, 11~15GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	11~15GHz
Insertion Loss:	1.8dB max.
VSWR:	1.6 max.
Isolation:	15dB min.
Amplitude Balance:	0.5dB max.
Phase Balance:	±6° max.
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

Mechanical


Size ^{*1} :	132*116*12.7mm 5.197*4.567*0.5in
Connectors:	SMA Female
Mounting:	4-Φ3.3mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

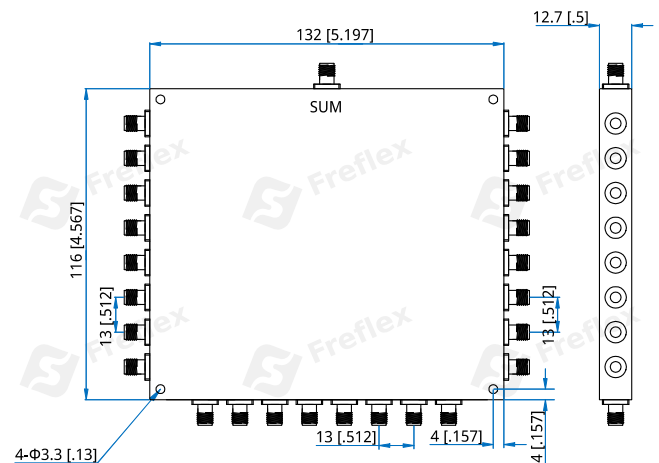

Unit: mm [in]
 Tolerance: ±0.3mm [±0.012in]

How To Order

FPD24-11000-15000-2-S

Customization is available upon request.