

FPD24-1300-1600-20-S

24-Way, 1.3~1.6GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	1.3~1.6GHz
Insertion Loss:	1.4dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	0.5dB max.
Phase Balance:	±6°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 2W max. as combiner

Mechanical


Size ^{*1} :	348*115*14mm 13.701*4.528*0.551in
Weight:	3Kg
Connectors:	SMA Female
Mounting:	4-Φ5.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

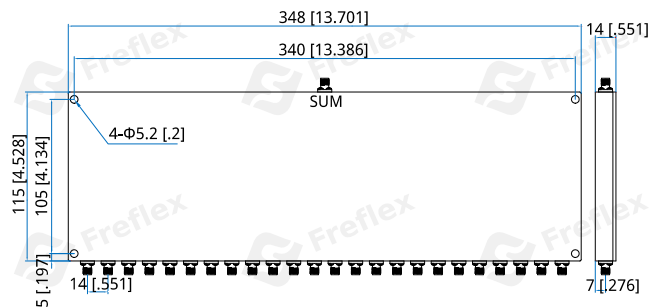

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order
FPD24-1300-1600-20-S

Customization is available upon request.