

FRC6-2000-6000-K2-NS

6-Way, 2~6GHz, 200W

Features:

- * Small Size
- * Low Insertion Loss
- * High Reliability

Applications:

- * Radar System
- * Communication System
- * Power Amplifier System
- * Test System

Electrical


Frequency:	2~6GHz
Insertion Loss:	0.5dB max.
VSWR:	1.5 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	200W CW as combiner
Peak Power:	1600W

Mechanical

Size ^{*1} :	72*28*32.33mm 2.835*1.102*1.273in
Connectors:	N female SMA female
Mounting:	4-M2.5-6H D5mm

[1] Exclude connectors.

Outline Drawings

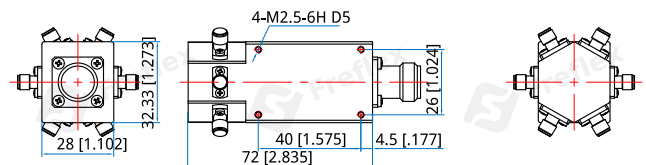

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FRC6-2000-6000-K2-NS

Customization is available upon request.