

FPD24-20-480-1-S

24-Way, 0.02~0.48GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.02~0.48GHz
Insertion Loss:	2.4dB max.
Input VSWR:	1.6 max.
Output VSWR:	1.3 max.
Isolation:	16dB min.
Amplitude Balance:	1dB max.
Phase Balance:	±12°
Impedance:	50Ω
Power @SUM Port:	1W max. as divider 0.15W max. as combiner

Mechanical


Size ^{*1} :	348*115*14mm 13.701*4.528*0.551in
Weight:	3Kg
Connectors:	SMA Female
Mounting:	4-Φ5.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

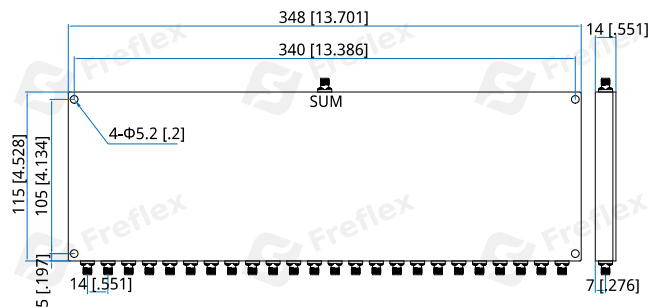

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD24-20-480-1-S

Customization is available upon request.