

FPD3-1000-18000-20-S

3-Way, 1~18GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	1~18GHz
Insertion Loss:	1.5dB max.
Input VSWR:	1.7 max.
Output VSWR:	1.6 max.
Isolation:	17dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±7° max.
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 0.5W max. as combiner

Mechanical


Size ^{*1} :	124*41*10mm 4.882*1.614*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

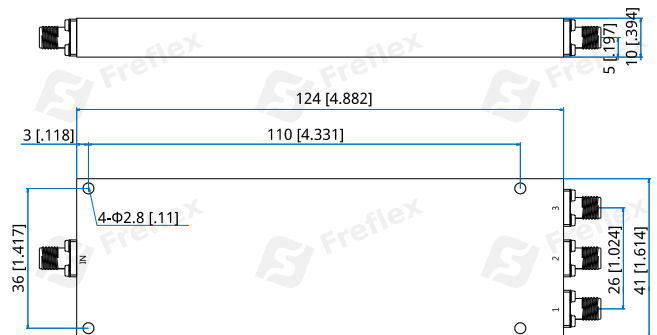

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPD3-1000-18000-20-S

Customization is available upon request.