

FSDC-500-8000-K4

0.5~8GHz, 400W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~8GHz
Directivity:	14dB min.
Impedance:	50Ω
Average Power:	400W max.
Peak Power:	3000W max.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)	Coupling Flatness (±dB max.)
30±0.8	0.5	1.4	1.1
40±0.9	0.5	1.4	1.2


Mechanical

RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	4-M3*5

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

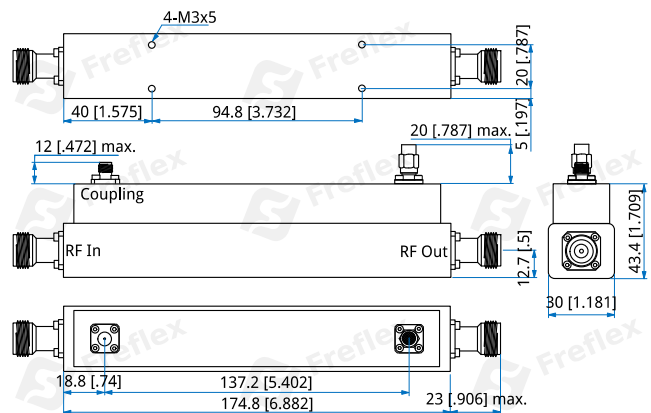

Unit: mm [in]

Tolerance: .xx±0.5mm [±0.02in], .xxx±0.1mm [±0.004in]

How To Order

FSDC-500-8000-K4-X-Y

X: Coupling (30, 40dB)

Y: Connector type

Connector naming rules:

NS - N female & SMA female

Examples:

To order a single directional coupler, 0.5~8GHz, 400W, 30dB, N female & SMA female, specify FSDC-500-8000-K4-30-NS.

Customization is available upon request.