

## FPD3-1500-6200-K15-N

### 3-Way, 1.5~6.2GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	1.5~6.2GHz
Insertion Loss:	1.0dB max.
VSWR:	1.5 max.
Isolation:	15dB min.
Amplitude Balance:	±0.5dB
Phase Balance:	±5°
Impedance:	50Ω
Power @SUM Port:	150W max. as divider 150W max. as combiner

**Mechanical**

Size <sup>*1</sup> :	100*40*22mm 3.937*1.575*0.866in
Connectors:	N Female
Mounting:	4-Φ3.3mm through-hole

[1] Exclude connectors.

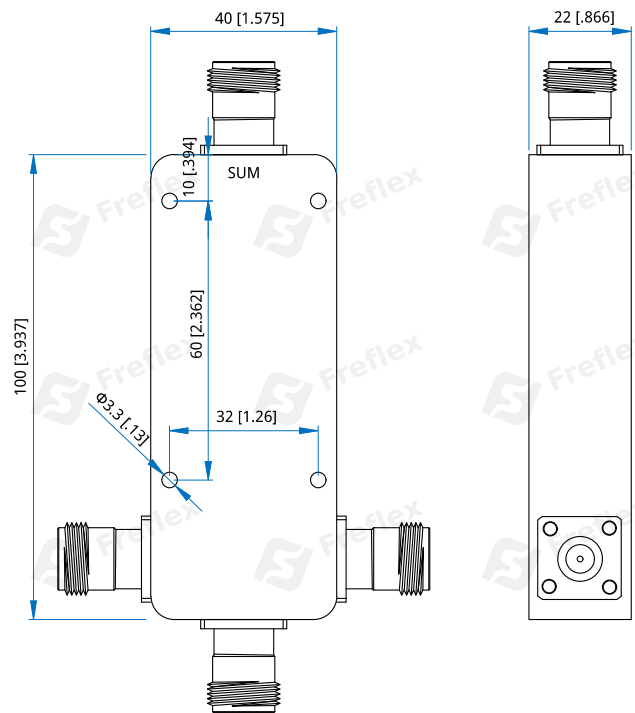
**Environmental**

Operation Temperature:	-40~+85°C
------------------------	-----------

**How To Order**

**FPD3-1500-6200-K15-N**

Customization is available upon request.

**Outline Drawings**


Unit: mm [in]  
Tolerance: ±0.3mm [±0.012in]