

# FPS5-400-8000-A

## SP5T, 0.4~8GHz, Absorptive

**Features:**

- \* Low Insertion Loss
- \* High Isolation

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

|                  |                                 |
|------------------|---------------------------------|
| Frequency:       | 0.4~8GHz                        |
| Insertion Loss:  | 2.2dB max.                      |
| Isolation:       | 70dB min.                       |
| VSWR:            | 1.5 max.                        |
| Input Power:     | 30dBm max.                      |
| Voltage/Current: | +5V@250mA max.<br>-5V@50mA max. |
| Control:         | TTL High - 1<br>TTL Low/NC - 0  |
| Impedance:       | 50Ω                             |

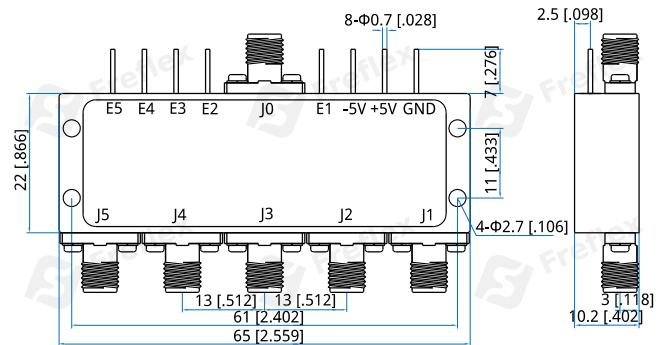
**Mechanical**

|                          |                                     |
|--------------------------|-------------------------------------|
| Size <sup>*1</sup> :     | 65*22*10.2mm<br>2.559*0.866*0.402in |
| Switching Time:          | 120ns max.                          |
| RF Connectors:           | SMA Female                          |
| Power Supply Connectors: | Feed Through/Terminal Post          |
| Housing Material:        | Nickel plated aluminum              |
| Mounting:                | 4-Φ2.7mm through-hole               |

[1] Exclude connectors.

**Environmental**

|                            |            |
|----------------------------|------------|
| Operating Temperature:     | -45~+85°C  |
| Non-operating Temperature: | -55~+125°C |

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**Control True Table**

| E1 | E2 | E3 | E4 | E5 | Connection |
|----|----|----|----|----|------------|
| 0  | 1  | 1  | 1  | 1  | J0-J1      |
| 1  | 0  | 1  | 1  | 1  | J0-J2      |
| 1  | 1  | 0  | 1  | 1  | J0-J3      |
| 1  | 1  | 1  | 0  | 1  | J0-J4      |
| 1  | 1  | 1  | 1  | 0  | J0-J5      |

**How To Order**

**FPS5-400-8000-A**

Customization is available upon request.