

FPD3-2000-8000-20

3-Way, 2~8GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~8GHz
Insertion Loss:	1.0dB max. (SMA) 1.2dB max. (N)
Input VSWR:	1.4 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	0.5dB max. (SMA) ±0.5dB (N)
Phase Balance:	±5° (SMA) ±6° (N)
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

Mechanical

Mounting:	4-Φ2.8mm through-hole (SMA) 4-Φ3.2mm through-hole (N)
-----------	--

Environmental

Operation Temperature: -45~+85°C

How To Order

FPD3-2000-8000-20-Y

Y: Connector type

Connector naming rules:


S - SMA Female (Outline A)

N - N Female (Outline B)


Examples:

To order a 3-way power divider, 2~8GHz, 20W, N female, specify FPD3-2000-8000-20-N.

Customization is available upon request.

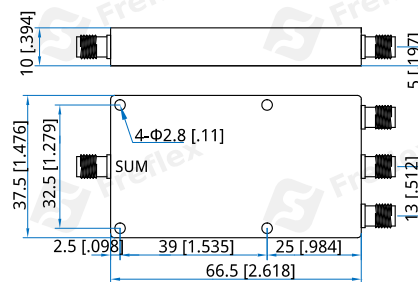Outline Drawings


Outline A

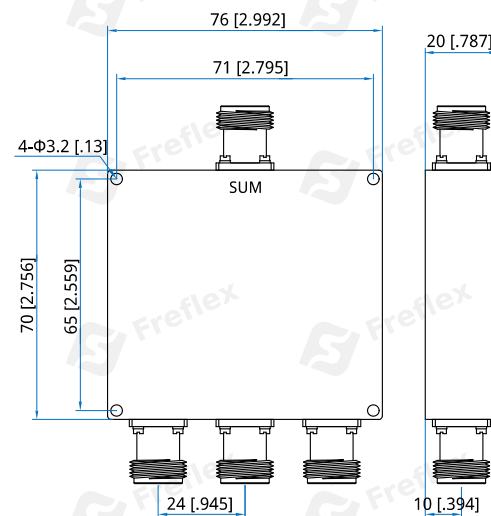

Outline B

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]