

FPD3-380-40000-20-K

3-Way, 0.38~40GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical


Frequency:	0.38~40GHz
Insertion Loss:	4.5dB max.
VSWR:	1.7 max.
Isolation:	17dB min.
Amplitude Balance:	±0.9dB max.
Phase Balance:	±10° max.
Power @SUM Port:	20W max. as divider

Mechanical

Size ^{*1} :	254*40.6*12.7mm 10*1.598*0.5in
Connectors:	2.92mm Female
Mounting:	6-Φ2.6mm through-hole

[1] Exclude connectors.

Outline Drawings

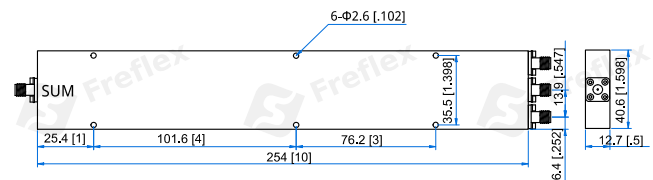

Unit: mm [in]

Tolerance: ±1mm [±0.039in]

How To Order

FPD3-380-40000-20-K

Customization is available upon request.