

FPD4-20-200-2K5-EN

4-Way, 0.02~0.2GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.02~0.2GHz
Insertion Loss ^{*1} :	0.5dB max.
VSWR (SUM Port):	1.25 max.
Isolation:	10dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	2500W as divider max. 2500W as combiner max.

[1] Excluding theoretical loss 6dB.

Mechanical


Size ^{*2} :	180*130*74mm 7.087*5.118*2.913in
Connectors:	SC Female, N female

[2] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
------------------------	-----------

Outline Drawings

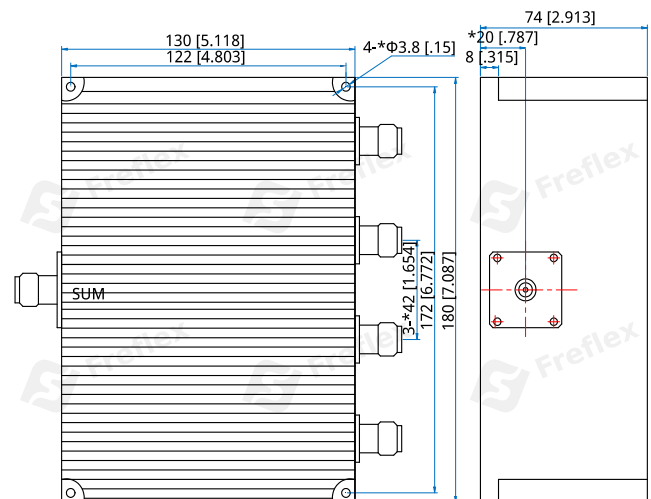

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FPD4-20-200-2K5-EN

Customization is available upon request.