

FPD4-4-30-3K-N

4-Way, 4~30MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	4~30MHz
Insertion Loss:	0.35dB max.
VSWR:	1.25 max.
Isolation:	20dB min.
Impedance:	50Ω
Power @SUM Port:	3000W as divider 3000W as combiner

Mechanical

Size*1:	200*185*165mm 7.874*7.283*6.496in
Connectors:	N Female
Mounting:	6-Φ4.5 through hole


[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+60°C
Non-operation Temperature:	-55~+85°C

Outline Drawings

(Reference dimensions)

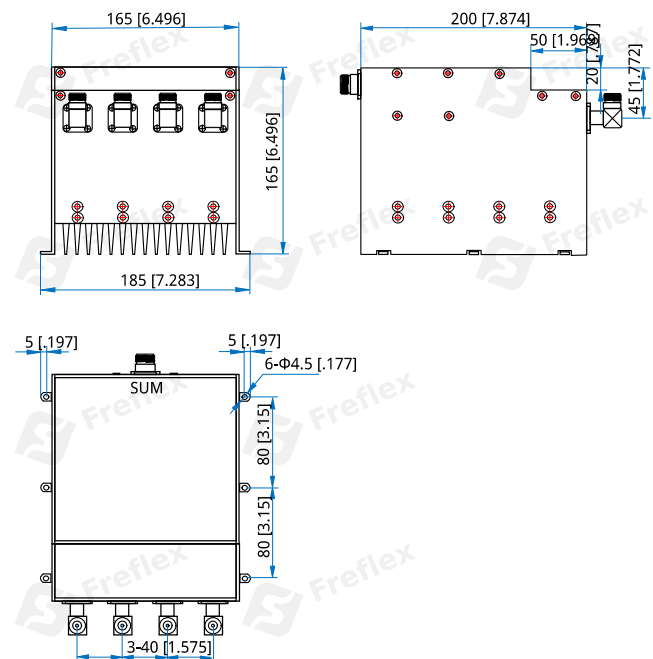

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD4-4-30-3K-N

Customization is available upon request.