



FPD4-80-1000-K5-N

4-Way, 0.08~1GHz

Features:
* Small Size
* Low Insertion Loss

Applications:

* Amplifiers

* Mixers

* Antennas

* Laboratory Test

Electrical

Frequency: 0.08-1GHz
Insertion Loss: 0.9dB max.
VSWR: 1.35 max.

Isolation: 12dB min.

Amplitude Balance: ±0.2dB max.

Phase Balance: ±5° max.

Power @SUM Port: 500W CW as divider

Mechanical

Size*1: 110*125*35mm


4.331*4.921*1.378in

Connectors: N Female

Mounting: 4-Φ3.8mm through-hole

[1] Exclude connectors.

Outline Drawings

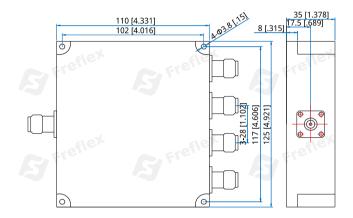

Unit: mm [in]

Tolerance: ±0.3mm [±0.018in]

How To Order

FPD4-80-1000-K5-N

Customization is available upon request.

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1