

## FPD4-80-1000-K75-N

### 4-Way, 0.08~1GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical


Frequency:	0.08~1GHz
Insertion Loss:	0.6dB max.
VSWR:	1.35 max.
Isolation:	15dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	5° max.
Power @SUM Port:	750W as divider 750W as combiner

#### Mechanical

Size <sup>*1</sup> :	120*120*40mm 4.724*4.724*1.575in
Connectors:	N Female
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors.

#### Outline Drawings

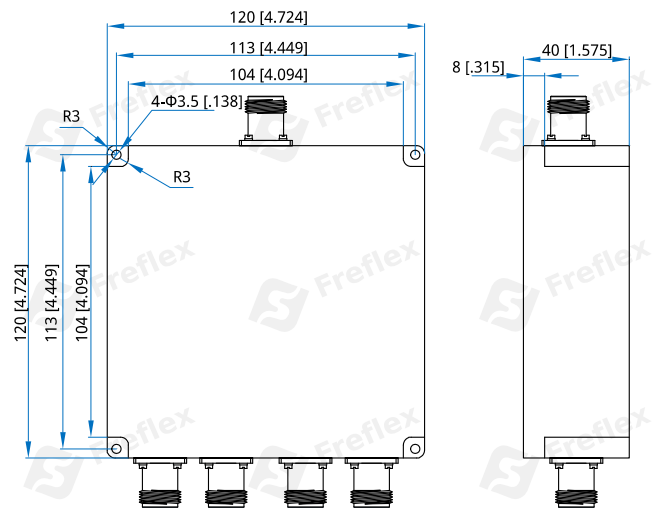

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

#### How To Order

**FPD4-80-1000-K75-N**

Customization is available upon request.