FPD4-820-1150-K8-7N

4-Way, 0.82~1.15GHz

Features:
* Small Size
* Low Insertion Loss

Applications:
* Amplifiers
* Mixers
* Antennas
* Laboratory Test

Electrical

Frequency:	0.82~1.15GHz
Insertion Loss*1:	0.3dB max.
VSWR:	1.2 max.
Isolation:	15dB min.
Amplitude Balance:	0.1dB max.
Phase Balance:	±3° max.
Impedance:	50Ω
Power @SUM Port:	800W as divider

[1] Excluding theoretical loss 6dB.

Mechanical

Size*2:	115*110*35mm
	4.528*4.331*1.378in
Connectors:	7/16 DIN (L29) female
	N female
Mounting:	4-Φ4.4mm through-hole

[2] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C

Outline Drawings

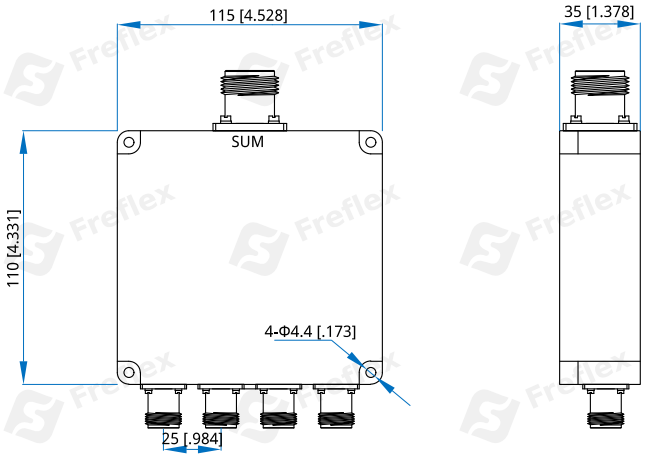

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FPD4-820-1150-K8-7N

Customization is available upon request.