

FPD6-0-1000-1-S

6-Way, DC~1GHz, 1W

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	DC~1GHz
Insertion Loss:	16±1.5dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	16dB min.
Amplitude Balance:	±0.6dB
Impedance:	50Ω
Power @SUM Port:	1W max. as divider

Mechanical


Size ^{*1} :	33.7*32.9*16mm 1.327*1.295*0.63in
Connectors:	SMA Female
Mounting:	3-M2, depth 5mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-20~+60°C
------------------------	-----------

Outline Drawings

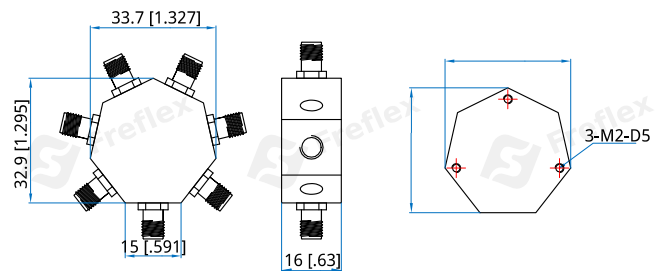

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD6-0-1000-1-S

Customization is available upon request.