

## FPD6-0-4000-2-N

6-Way, DC~4GHz, 2W

### Features:

- \* Broadband
- \* Low Insertion Loss
- \* High Power

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	DC~4GHz
Insertion Loss:	16.5±1.5dB max.
VSWR:	1.4 max.
Isolation:	15dB min.
Amplitude Balance:	±1dB
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

### Mechanical


Size <sup>*1</sup> :	46*47.19*20mm 1.811*1.858*0.787in
Connectors:	N Female
Mounting:	4-M2.5, depth 5mm

[1] Exclude connectors.

### Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

### Outline Drawings

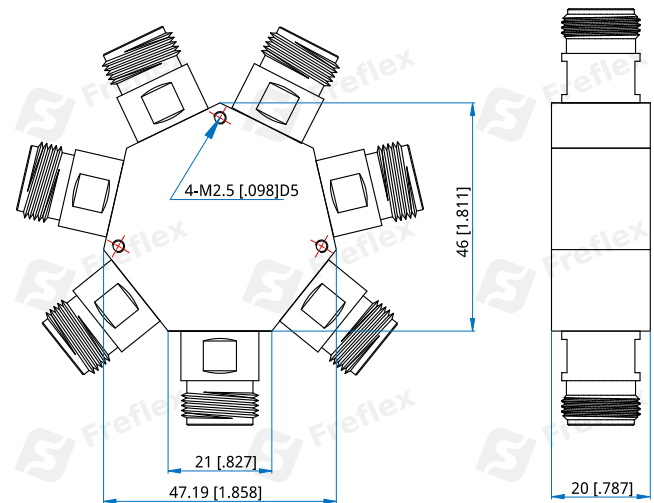

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**FPD6-0-4000-2-N**

Customization is available upon request.