

FPD6-1-200-2-S

6-Way, 1~200MHz, 2W

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	1~200MHz
Insertion Loss:	15.9dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	14.6dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

Mechanical


Size ^{*1} :	92*44*12.5mm 3.622*1.732*0.492in
Weight:	135g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

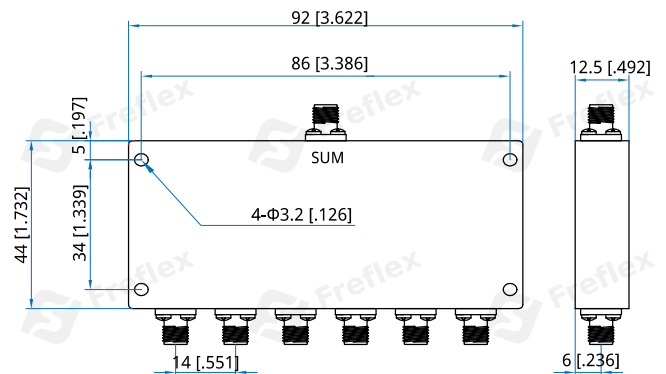

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

FPD6-1-200-2-S

Customization is available upon request.