

## FPD6-2-250-2-S

### 6-Way, 2~250MHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test


#### Electrical

Frequency:	2~250MHz
Insertion Loss:	1.3dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.65 max.
Isolation:	20dB min.
Amplitude Balance:	±0.6dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

#### Mechanical

Size <sup>*1</sup> :	10*9.65*6.73mm
	0.394*0.38*0.265in

[1] Exclude connectors.

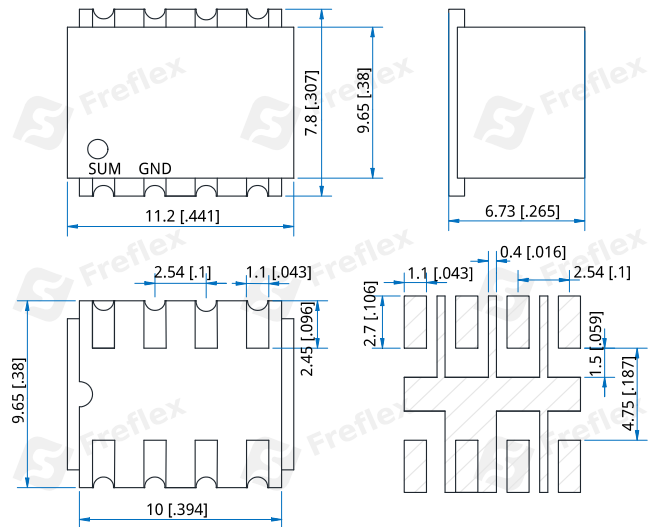

Unit: mm [in]  
 Tolerance: ±0.3mm [±0.012in]

#### How To Order

### FPD6-2-250-2-S

Customization is available upon request.

#### Outline Drawings