

## FPD6-900-6100-20-S

### 6-Way, 0.9~6.1GHz

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

#### Electrical

Frequency:	0.9~6.1GHz
Insertion Loss:	3dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±8° max.
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

#### Mechanical


Size <sup>*1</sup> :	138*94*10mm 5.433*3.701*0.394in
Weight:	360g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

#### Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

#### Outline Drawings

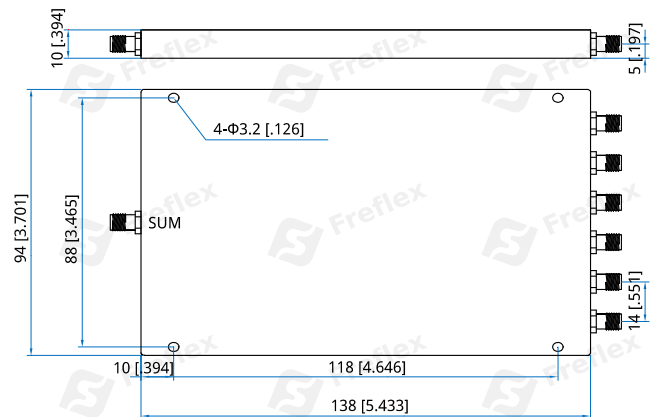

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]

#### How To Order

**FPD6-900-6100-20-S**

Customization is available upon request.