



FPD8-0-10000-R5-S

8-Way, DC~10GHz, 0.5W

Features: * Small Size

Applications: * Amplifiers

* Low Insertion Loss

* Mixers * Antennas

* Laboratory Test

Electrical

Frequency: DC~10GHz
Insertion Loss: 18±2.8dB max.

VSWR: 1.6 max.

Amplitude Balance: ±2.0dB max.

Impedance: 50Ω

Power @SUM Port: 0.5W as divider

Mechanical

Size*1: 106*50*12mm

4.173*1.969*0.472in

Connectors: SMA Female


Mounting: 2-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -35~+75°C

Outline Drawings

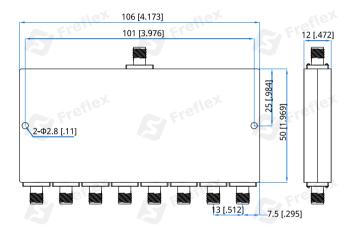

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD8-0-10000-R5-S

Customization is available upon request.

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1