

FPD8-0-2000-2-S

8-Way, DC~2GHz, 2W

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	DC~2GHz
Insertion Loss:	19dB max.
Input VSWR:	1.15 max.
Output VSWR:	1.15 max.
Isolation:	17.5dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	2W as divider

Mechanical


Size ^{*1} :	120*60*12mm 4.724*2.362*0.472in
Weight:	220g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

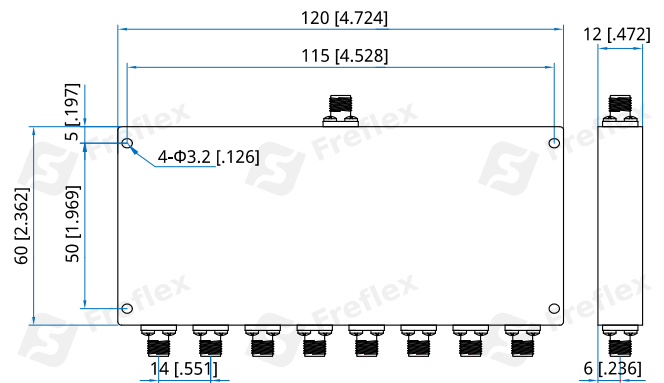

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]

How To Order

FPD8-0-2000-2-S

Customization is available upon request.