

FPD8-108-138-50-N

8-Way, 0.108~0.138GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.108~0.138GHz
Insertion Loss:	0.8dB max.
VSWR:	1.25 max.
Isolation:	15dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	±4° max.
Impedance:	50Ω
Power @SUM Port:	50W as divider 50W as combiner

Mechanical


Size ^{*1} :	420*200*25mm 16.535*7.874*0.984in
Connectors:	N Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

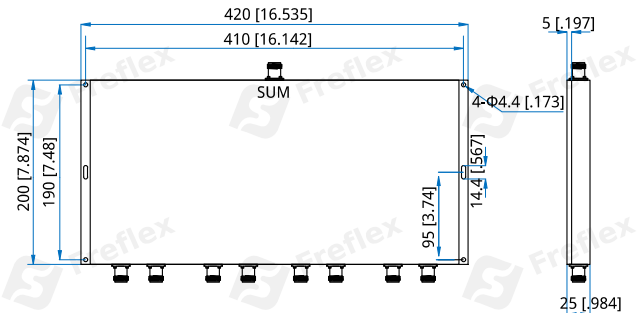

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FPD8-108-138-50-N

Customization is available upon request.