

FPD8-500-6000-30

8-Way, 0.5~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.5~6GHz
Insertion Loss:	3.0dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±6°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical

Mounting:	4-Φ3.2mm through-hole (SMA) 4-Φ4.2mm through-hole (N)
-----------	--

Environmental

Operating Temperature:	-40~+85°C
Non-operating Temperature:	-55~+100°C

How To Order

FPD8-500-6000-30-Y

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:


To order a 8-way power divider, 0.5~6GHz, 30W, N female, specify FPD8-500-6000-30-N.

Customization is available upon request.

Outline Drawings

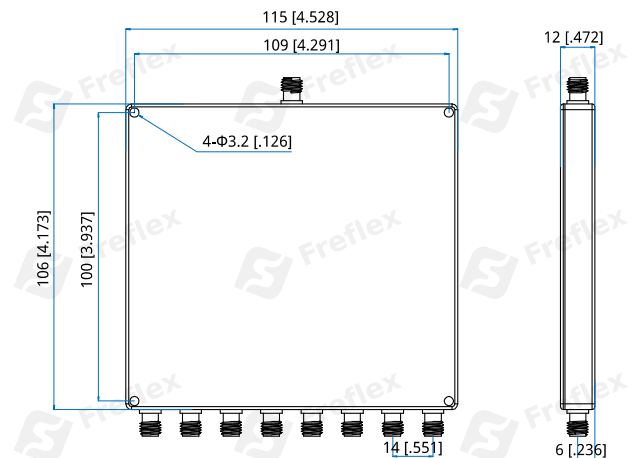

Outline A

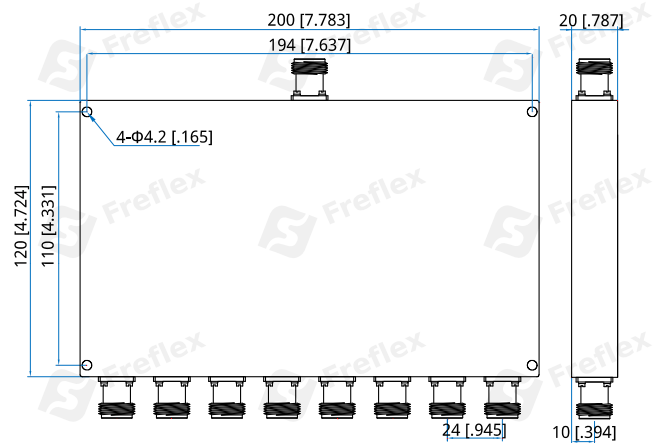

Outline B

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Typical Performance Curves SMA

