

FHC9-1000-2000-30-S

1~2GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1~2GHz
Insertion Loss:	0.3dB max.
VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±2°
Average Power:	30W max.
Impedance:	50Ω

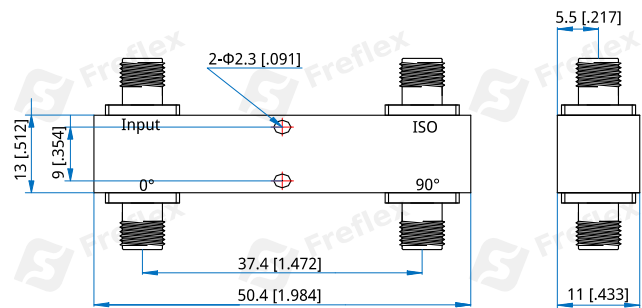
Mechanical

Size ^{*1} :	50.4*13*11mm 1.984*0.512*0.433in
RF Connectors:	SMA Female
Mounting:	2-Φ2.3mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FHC9-1000-2000-30-S

Customization is available upon request.