

FHC9-1000-3000-K1-S

1~3GHz, 100W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1~3GHz
Insertion Loss:	0.6dB max.
VSWR:	1.35 max.
Isolation:	18dB min.
Amplitude Balance:	±0.7dB max.
Phase Balance:	±5° max.
Average Power:	100W
Impedance:	50Ω

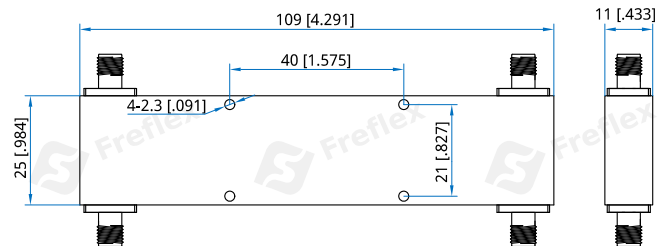
Mechanical

Size ^{*1} :	109*25*11mm 4.291*0.984*0.433in
RF Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-40~+70°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FHC9-1000-3000-K1-S

Customization is available upon request.