

FHC9-150-250-K25-N

0.15~0.25GHz, 250W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.15~0.25GHz
Insertion Loss:	0.25dB max.
VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±2° max.
Average Power:	250W
Impedance:	50Ω

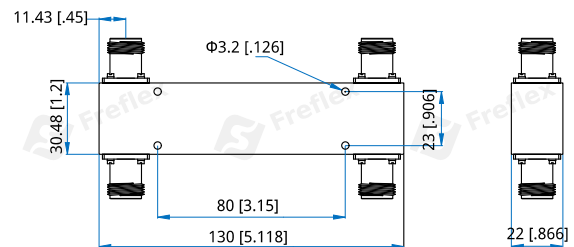
Mechanical

Size ^{*1} :	130*30.48*22mm 5.118*1.2*0.866in
RF Connectors:	N Female
Mounting:	4-Φ3.2mm through hole

[1] Exclude connectors.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FHC9-150-250-K25-N

Customization is available upon request.