

## FHC9-2000-6000-30-S

### 2~6GHz, 30W

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	2~6GHz
Insertion Loss:	0.4dB max.
VSWR:	1.4 max.
Isolation:	18dB min.
Amplitude Balance:	±0.7dB max.
Phase Balance:	90±5°
Average Power:	30W
Impedance:	50Ω

**Mechanical**

Size <sup>*1</sup> :	53*22*11mm 2.087*0.866*0.433in
RF Connectors:	SMA Female
Mounting:	2-Φ2.3mm through hole

[1] Exclude connectors.

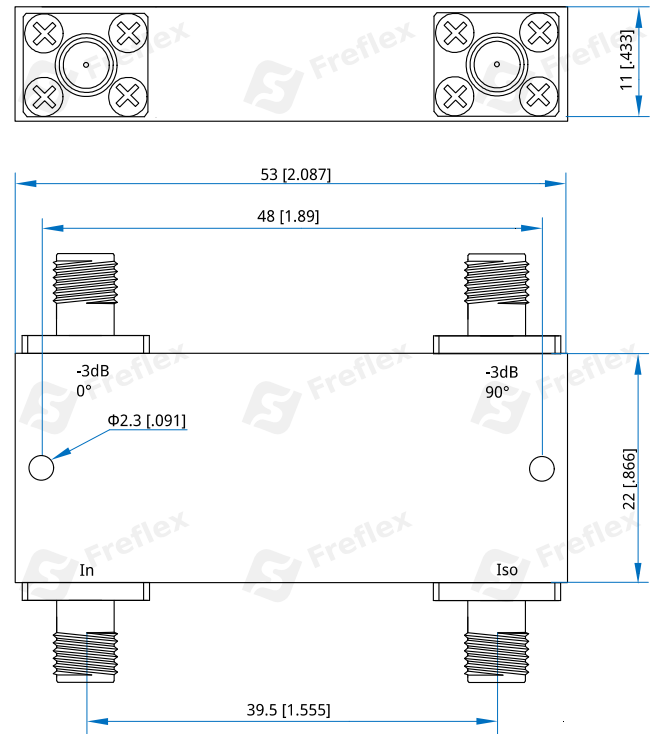
**Environmental**

Operating temperature:	-40~+85°C
------------------------	-----------

**How To Order**

**FHC9-2000-6000-30-S**

Customization is available upon request.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]