

## FHC9-225-400-50-S

225~400MHz, 50W

### Features:

- \* Broadband
- \* High Power
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	225~400MHz
Insertion Loss:	0.3dB max.
Isolation:	20dB min.
VSWR:	1.25 max.
Amplitude Balance:	±0.5dB
Phase Balance:	±4°
Average Power:	50W.
Impedance:	50Ω

### Mechanical


Size*1:	72*30*14mm 2.835*1.181*0.551in
RF Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-30~+70°C
------------------------	-----------

### Outline Drawings

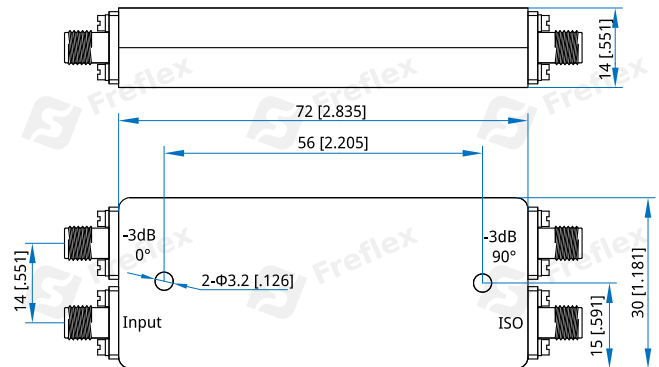

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FHC9-225-400-50-S**

Customization is available upon request.