

FHC9-300-6000-30-S

0.3~6GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.3~6GHz
Insertion Loss:	2.2dB max.
VSWR:	1.5 max.
Isolation:	16dB min.
Amplitude Balance:	±1.1dB max.
Phase Balance:	±7° max.
Average Power:	30W max.
Impedance:	50Ω

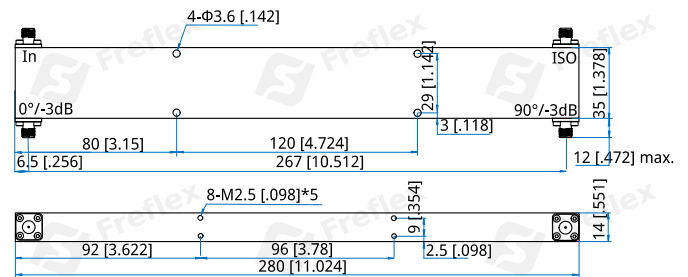
Mechanical

Size*1:	280*35*14mm 11.024*1.378*0.551in
Connectors:	SMA Female
Mounting:	4-Φ3.6mm through-hole 8-M2.5*5

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings


Unit: mm [in]

Tolerance: .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

FHC9-300-6000-30-S

Customization is available upon request.