

FHC9-500-2500-K5-NM

0.5~2.5GHz, 500W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	0.5~2.5GHz
Insertion Loss:	0.3dB max.(average)
Isolation:	16dB min.
VSWR:	1.35 max.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±5° max.
Average Power:	500W

Mechanical


Size*1:	180*50*22mm 7.087*1.969*0.866in
RF Connectors:	N Male
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

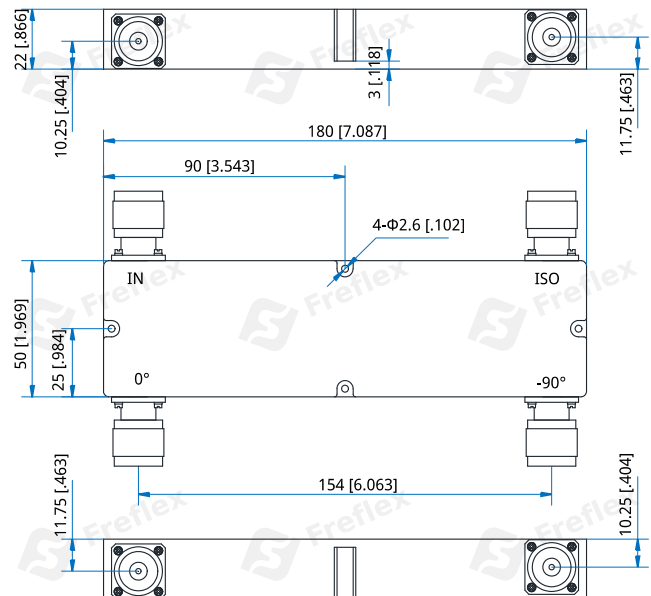

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHC9-500-2500-K5-NM

Customization is available upon request.