

FHC9-500-9000-50-S

0.5~9GHz, 50W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~9GHz
Insertion Loss:	1.8dB max.
VSWR:	1.6 max.
Isolation:	16dB min.
Amplitude Balance:	±1.1dB max.
Phase Balance:	±12°
Average Power:	50W
Impedance:	50Ω

Mechanical


Size*1:	131*25*11mm 5.157*0.984*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

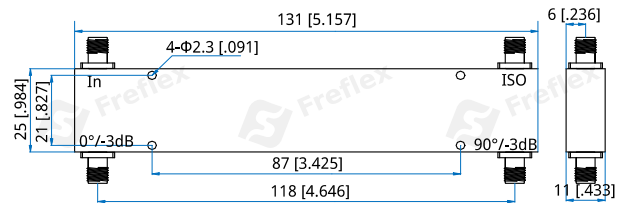

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FHC9-500-9000-50-S

Customization is available upon request.