

FBM-10-20000

0.01~20GHz

Features:

- * Low Conversion Loss
- * High Isolation

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Broadcast

Electrical

RF Frequency:	0.01~20GHz
LO Frequency:	0.01~20GHz
LO Input Power:	15dBm typ.
IF Frequency:	0.001~6GHz
Conversion Loss:	14dB max.
Isolation (LO, RF):	30dB typ.
Isolation (LO, IF):	30dB typ.
Isolation (RF, IF):	30dB typ.

Mechanical


Size:	39.84*24.93*7.9mm 1.569*0.981*0.311in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

How To Order

FBM-10-20000

Customization is available upon request.

Outline Drawings

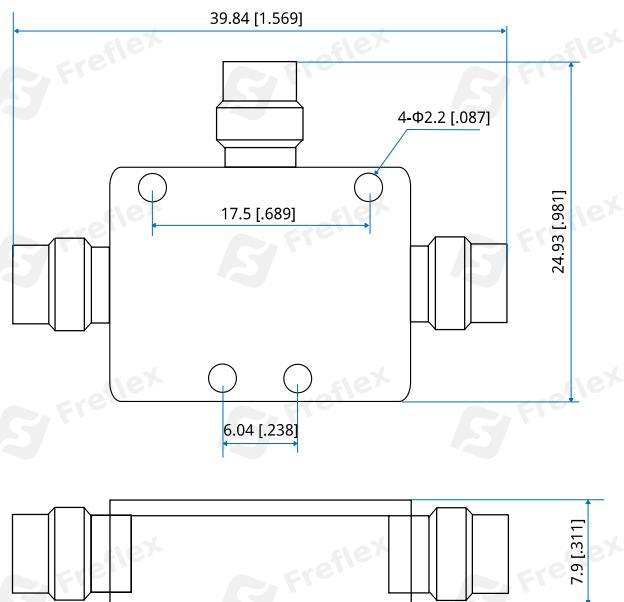

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]