

FBM-2000-40000

2~40GHz

Features:

- * Low Conversion Loss
- * High Isolation

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Broadcast


Electrical

LO/RF Frequency:	2~40GHz
LO Input Power:	13~17dBm
IF Frequency:	DC~3GHz
Conversion Loss:	10dB typ.
Isolation:	20dB min.
RF Input Power (P1dB):	4dBm typ.

Mechanical

Size:	43*22.8*7.9mm 1.693*0.898*0.311in
Connectors:	SMA Female 2.92mm Female

Outline Drawings

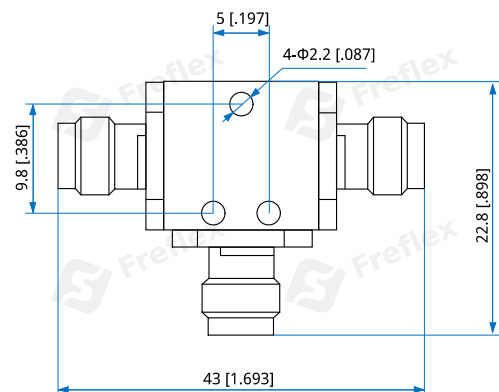

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

FBM-2000-40000

Customization is available upon request.