

FBF-1390-1410-80

High Stopband Rejection

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|-----------------------|--|
| Passband: | 1.39~1.41GHz |
| Passband Ripple: | 1dB max. |
| Insertion Loss at CF: | 2dB max. |
| VSWR: | 1.3dB max. |
| Stopband Attenuation: | 80dB@1.35GHz min. 80dB@1.47GHz min. |

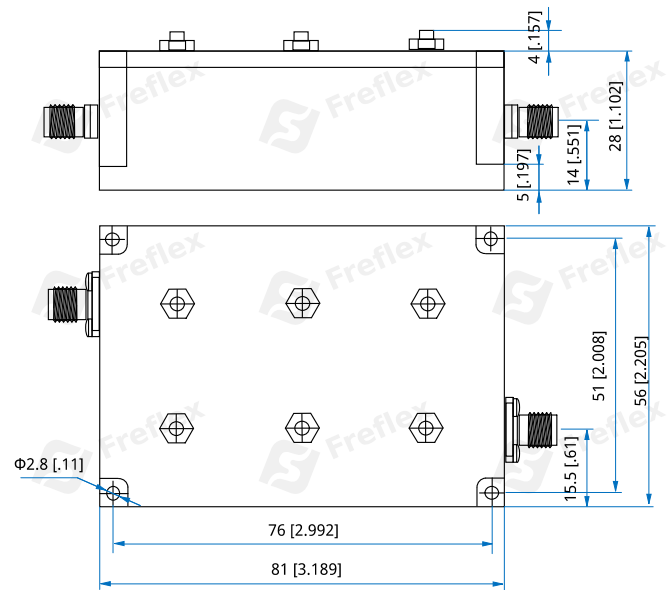
Mechanical

| | |
|----------------|-----------------------------------|
| Size*1: | 81*56*28mm 3.189*2.205*1.102in |
| RF Connectors: | SMA Female |
| Mounting: | 4- Φ 2.8mm Through-hole |

[1] Exclude connectors.

Environmental

| | |
|----------------------|-----------|
| Working Temperature: | -40~+75°C |
| Storage Temperature: | -55~+85°C |

Outline Drawings


Unit: mm

Tolerance: \pm 0.2mm [\pm 0.008in]

How To Order

FBF-1390-1410-80

Customization is available upon request.