

FBF-1400-1800-60

1.4~1.8GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

| | |
|--------------------------|---|
| Passband: | 1.4~1.8GHz |
| Passband Insertion Loss: | 2dB max. |
| Passband Ripple: | 1dB max. |
| VSWR: | 1.5 max. |
| Stopband Attenuation: | 60dB@DC~1.3GHz min. 60dB@1.9~3GHz min. |
| Impedance: | 50Ω |
| Average Power: | 5W max. |

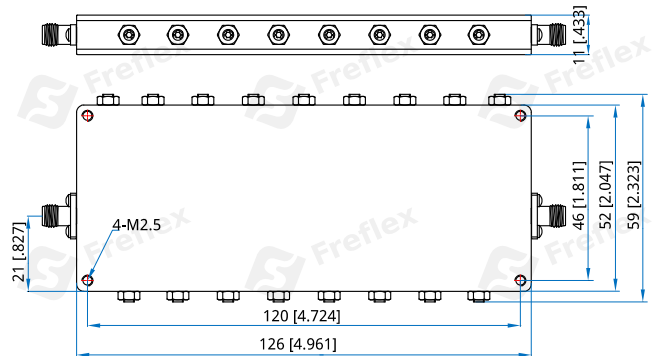
Mechanical

| | |
|----------------------|------------------------------------|
| Size ^{*1} : | 126*59*11mm 4.961*2.323*0.433in |
| Connectors: | SMA Female |
| Mounting: | 4-M2.5 through-hole |

[1] Exclude connectors.

Environmental

| | |
|--------------|-----------|
| Temperature: | -30~+70°C |
|--------------|-----------|

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBF-1400-1800-60

Customization is available upon request.